

The AGM50, our hand-held Gas Leak Detector, specifically designed for **HVAC applications** is a **'must' in any heating engineer's tool kit**. It pinpoints flammable gas leaks in residential and commercial applications and also verifies that the work undertaken is leak free.



AGM50 Model

General Specification

Sensitive to:	Methane, Propane, Natural Gas, Butane & others*
Power Supply:	9v Alkaline Battery
Sensitivity:	10 ppm Methane
Warm up:	Approx 1 minute
Response time:	Instantaneous
Size:	3.0" x 6.5" x 1.5" (77 x 170 x 40) mm
Weight:	1.lb (450g)
Probe Length:	16" (406mm)

For other options, please contact us digitronsales@rototherm.co.uk or +44 (0)1656 740551

Key Features and Benefits

- Simple, adjustable 'tic rate' increases as the sensor tip approaches a leak
- Audible and visual 'tic-rate', fully adjustable
- Long 400mm gooseneck for remote access
- 'LED-Light' illuminates the tip sensing area
- High sensitivity provides accurate detection
- Rubber boot protects instrument

Main Applications

A **world leader** in digital detectors, Rototherm has become the standard for accurate and reliable measurement across the following industries:



Technical Certification

- Instrument & Probe Calibration Certificate

Export Documentation


- Certificate of Origin
- EUR1
- ATR

Calibration and After-Sales Support

- Fully trained field service personnel
- Use of UKAS certified calibration equipment
- 5 day turnaround
- Fixed pricing
- Approved manufacturer parts
- Full post-service reports
- 12 month warranty



ISO9001:2015
FM11958

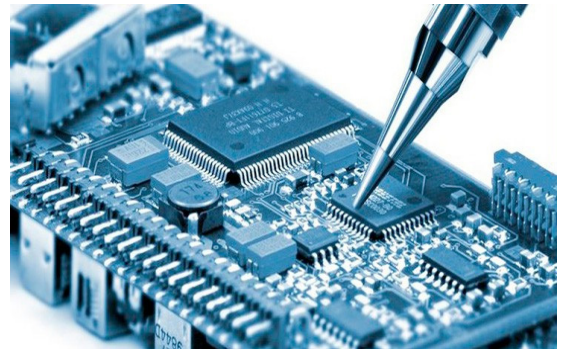

For more information, please contact our service team
digitronservice@rototherm.co.uk